



DESCRIPTION


The JD431/JD431SWR are three-terminal adjustable shunt regulators with specified thermal stability .The output voltage may be set to any value between Vref and 36V with two external resistors . Active output circuitry provides a very sharp turnon characteristic,making these devices excellent replacements for zener diodes in many applications.

Features

- The output voltage can be adjusted 2.5V to 36V
- The JD431/JD431SWR precision reference is offered in two voltage tolerance: 0.5% and 1.0%.
- Fast turn-on response
- Sink current capability 1mA to 100mA
- Low output noise
- Industrial temperature range

PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| A | ANODE |
| K | CATHODE |
| R | REFERENCE |

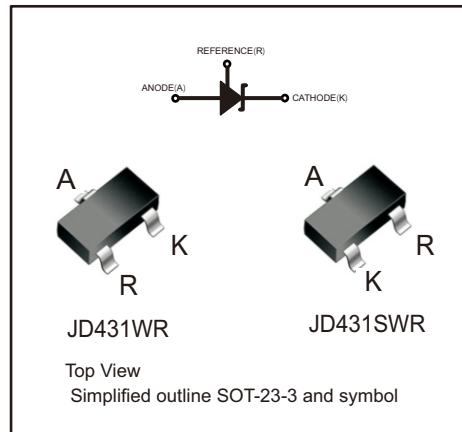

Application

- Shunt regulator
- High-current shunt regulator
- Precision current limiter

Absolute Maximum Ratings (Note 1)

| Symbol | Parameter | | Rating | Unit |
|------------------|--|----------|-------------------|------|
| V _{KA} | Cathode Voltage | | 36 | V |
| I _{KA} | Cathode Current Range (Continuous) | | -100 to 150 | mA |
| I _{REF} | Reference Input Current Range | | 0.05~10 | mA |
| P _D | Power Dissipation | | Z, R Package: 770 | mW |
| | | | N Package: 300 | |
| θ _{JA} | Thermal Resistance (Junction to Ambient) | SOT-23-3 | 380 | °C/W |
| T _J | Junction Temperature | | +150 | °C |
| T _{STG} | Storage Temperature Range | | -65 to +150 | °C |
| ESD | ESD (Human Body Model) | | 2000 | V |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.



Recommended Operating Conditions

| Symbol | Parameter | Min | Max | Unit |
|-----------------|-------------------------------------|------------------|-----|------|
| V _{KA} | Cathode Voltage | V _{REF} | 36 | V |
| I _{KA} | Cathode Current | 1.0 | 100 | mA |
| T _A | Operating Ambient Temperature Range | -25 | +85 | °C |

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

| Symbol | Parameter | | Conditions | | Min | Typ | Max | Unit |
|---------------------------------------|---|------|---|---|-------|-------|-------|------|
| V _{REF} | Reference Voltage | 0.5% | JD431AWR | V _{KA} = V _{REF} , I _{KA} = 10mA | 2.488 | 2.500 | 2.512 | V |
| | | | JD431SAWR | | | | | |
| | | 1% | JD431BWR | V _{KA} = V _{REF} , I _{KA} = 10mA | 2.475 | 2.500 | 2.525 | |
| | | | JD431SBWR | | | | | |
| ΔV _{REF} | Deviation of Reference Voltage Over Full Temperature Range | | V _{KA} = V _{REF} , I _{KA} = 10mA T _{min} ≤ T _A ≤ T _{max} | | — | 4.5 | 17 | mV |
| ΔV _{REF} ΔV _{KA} | Ratio of Change in Reference Voltage to the Change in Cathode Voltage | | I _{KA} = 10mA | ΔV _{KA} = 10V to V _{REF} | — | -1.0 | -2.7 | mV/V |
| | | | | ΔV _{KA} = 36V to 10V | — | -0.5 | -2.0 | |
| I _{REF} | Reference Current | | I _{KA} = 10mA, R ₁ = 10kΩ, R ₂ = ∞ | | — | 1.5 | 4 | μA |
| ΔI _{REF} | Deviation of Reference Current Over Full Temperature Range | | I _{KA} = 10mA, R ₁ = 10kΩ R ₂ = ∞, T _A = full Temperature | | — | 0.4 | 1.2 | μA |
| I _{KA} (Min) | Minimum Cathode Current for Regulation | | V _{KA} = V _{REF} | | — | 0.45 | 1.0 | mA |
| I _{KA} (Off) | Off-state Cathode Current | | V _{KA} = 36V, V _{REF} = 0 | | — | 0.05 | 1.0 | μA |
| Z _{KA} | Dynamic Impedance | | V _{KA} = V _{REF} , I _{KA} = 1 to 100mA, f ≤ 1.0kHz | | — | 0.15 | 0.5 | Ω |



FIGURE 1. TEST CIRCUIT FOR $V_{KA} = V_{REF}$

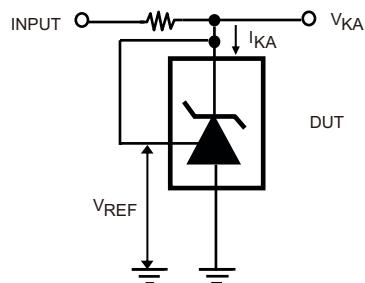


FIGURE 2. TEST CIRCUIT FOR $V_{KA} \geq V_{REF}$

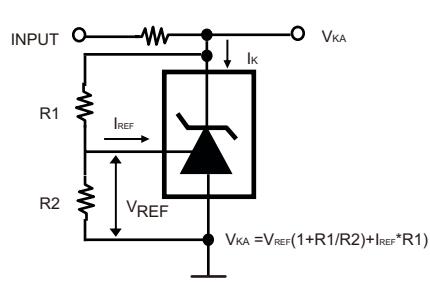


FIGURE 3. TEST CIRCUIT FOR I_{KA} (OFF)

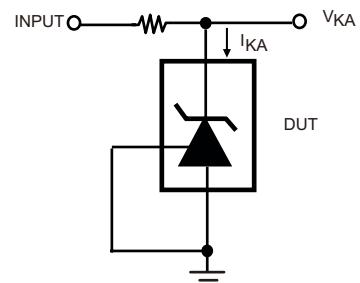


FIGURE 4. TEST CIRCUIT FOR PULSE RESPONSE


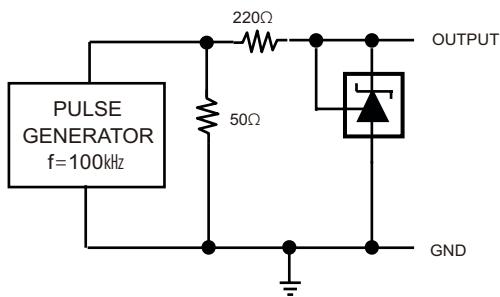


FIGURE 5. TEST CIRCUIT REFERENCE IMPEDANCE



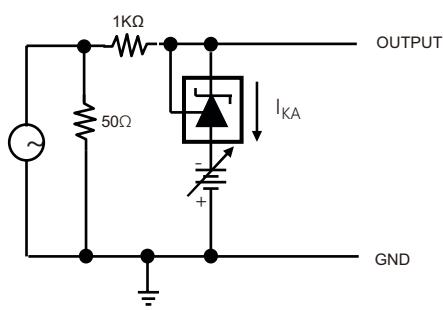

Typical Characteristics

Fig.1 CATHODE CURRENT VS CATHODE VOLTAGE

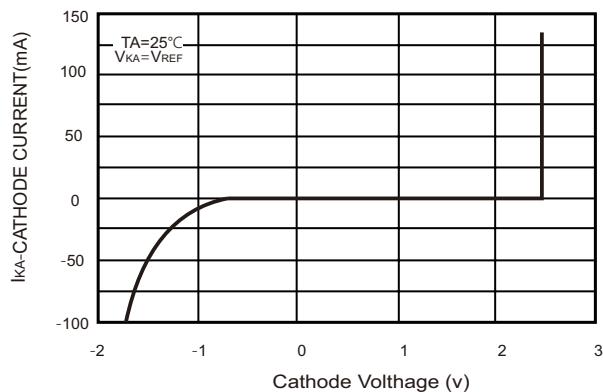


Fig.2 CATHODE CURRENT VS CATHODE VOLTAGE

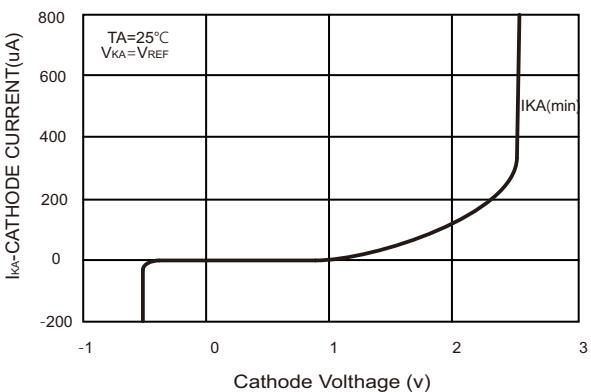


Fig.3 CHANGE IN REFERENCE INPUT VOLTAGE VS CATHODE VOLTHAGE

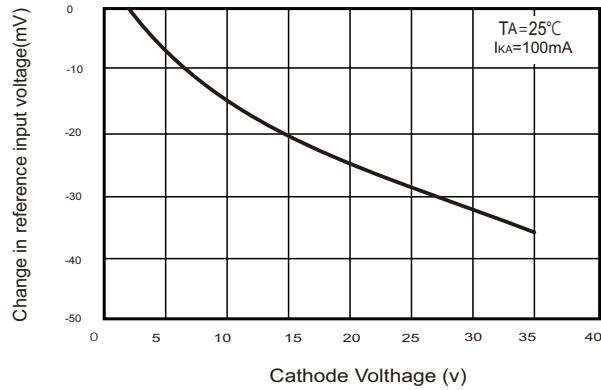


Fig.4 PULSE RESPONSE

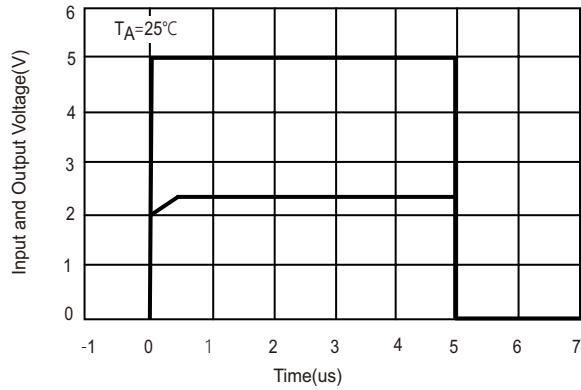


Fig.5 IMPEDANCE VS FREQUENCY




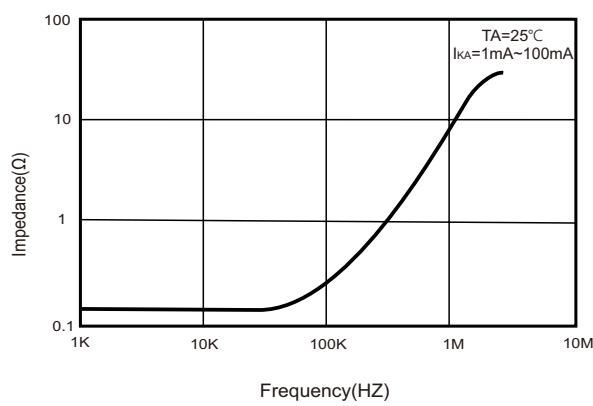


Fig.6 SMALL SIGNAL VOLTAGE AMPLIFICATIONVS FREQUENCY

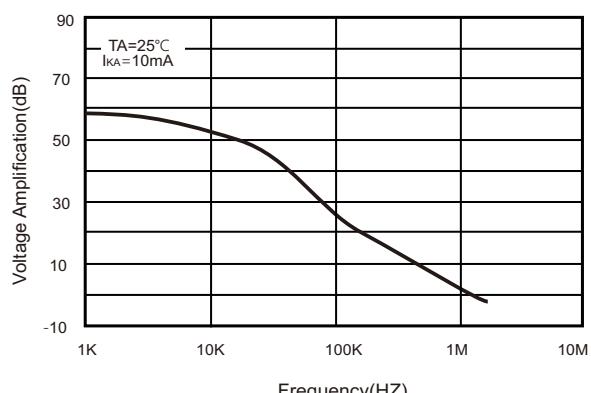

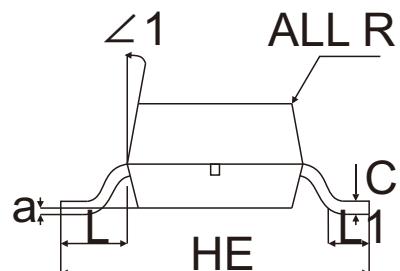


SOT-23-3 Package Outline Dimensions

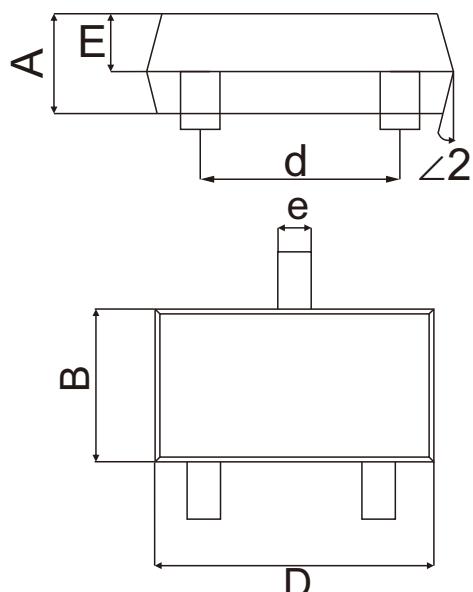

| Unit | | A | B | C | HE | D | d | E | e | L | L1 | a | R | $\angle 1$ | $\angle 2$ |
|------|-----|------|------|------|------|------|------|------|------|------|------|--------------|---------------|-----------------------|-----------------------|
| mm | max | 1.05 | 1.80 | 0.20 | 2.90 | 3.12 | 2.00 | 0.65 | 0.40 | 0.70 | 0.60 | 0.2 (ref) | R0.1 (ref) | 12° | 10° |
| | typ | 0.95 | 1.60 | 0.15 | 2.80 | 2.92 | 1.90 | 0.55 | 0.35 | 0.60 | / | | | | |
| | min | 0.85 | 1.40 | 0.10 | 2.70 | 2.72 | 1.80 | 0.45 | 0.30 | 0.50 | 0.20 | | | | |
| mil | max | 41 | 71 | 8 | 114 | 123 | 79 | 26 | 16 | 28 | 24 | 8 (ref) | R4 (ref) | 12° | 10° |
| | typ | 37 | 63 | 6 | 110 | 115 | 75 | 22 | 14 | 24 | / | | | | |
| | min | 33 | 55 | 4 | 106 | 107 | 71 | 18 | 12 | 20 | 8 | | | | |

The recommended mounting pad size

Marking

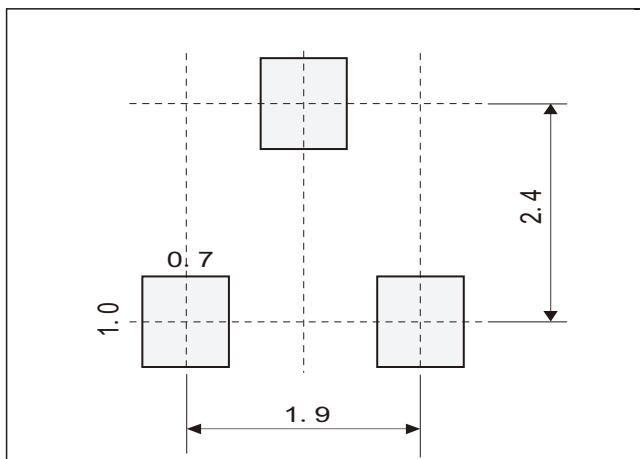

| NumbType er | Marking code |
|-------------|--------------|
| JD431AWR | J431A |
| JD431BWR | J431B |
| JD431SAWR | 431JA |
| JD431SBWR | 431JB |



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.