


Transient Voltage Suppressors for ESD Protection

General Description

The ESD2V5D5 is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

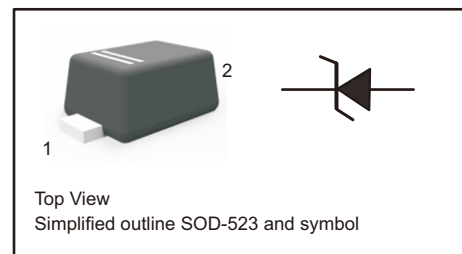

Features


- 120 Watts peak pulse power ($t_p = 8/20\mu s$)
- Uni-directional ESD protection of one line
- IEC 61000-4-2 (ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)
- Suitable replacement for MLV's in ESD protection applications
- Working voltages: 2.5V
- Low leakage current
- Low clamping voltage

APPLICATIONS

- Computers and peripherals
- Audio and video equipment
- Cellular handsets and accessories
- Portable electronics
- Other electronics equipments communication systems

Electronics Parameter

| Parameter | Symbol |
|-------------------------------------|-----------|
| Maximum Reverse Peak Pulse Current | I_{PP} |
| Clamping Voltage @ I_{PP} | V_C |
| Peak Reverse Working Voltage | V_{RWM} |
| Reverse Leakage Current @ V_{RWM} | I_R |
| Breakdown Voltage @ I_T | V_{BR} |
| Test Current | I_T |
| Forward Current | I_F |
| Forward Voltage @ I_F | V_F |

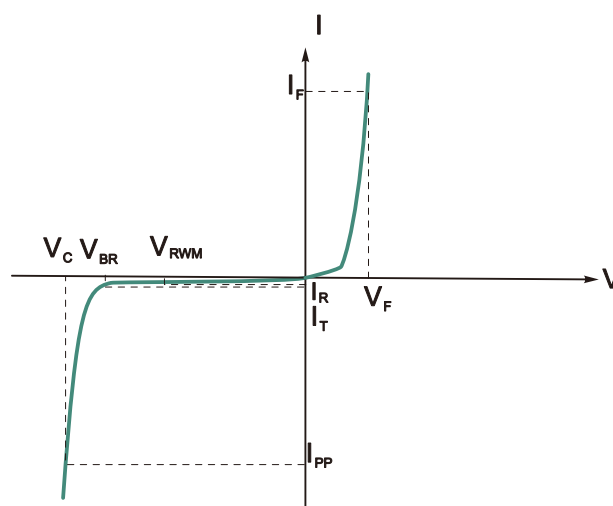



Absolute Ratings
(Tamb=25°C)

| Parameter | Symbol | Value | Unit |
|--|------------------|-------------|------|
| IEC 61000-4-2 ESD Voltage Air Model | V _{ESD} | ±30 | KV |
| IEC 61000-4-2 ESD Voltage Contact Model | | ±30 | |
| Peak Pulse Power(tp=8/20us) | P _{PK} | 120 | W |
| Peak Pulse Current(tp=8/20us) | I _{PP} | 11.0 | A |
| Maximum junction temperature | T _J | -55 to +150 | °C |
| Storage Temperature | T _{STG} | -55 to +150 | °C |

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter | Symbol | Conditions | Min | Typ | Max | Units |
|---------------------------|--------|---------------------------------|-----|-----|------|-------|
| Reverse stand-off voltage | VRWM | | | | 2.5 | V |
| Reverse Breakdown Voltage | VBR | IT=1mA | 4.0 | | | V |
| Reverse Leakage Current | IR | VR=VRWM | | | 6.0 | uA |
| Clamping Voltage | VC | I _{PP} =5A, tp=8/20us | | | 6.5 | V |
| Clamping Voltage | VC | I _{PP} =11A, tp=8/20us | | | 11.9 | V |
| Junction Capacitance | Cj | VR=0V, f=1MHz | | 145 | | pF |



Fig.1 8 X 20us Pulse Waveform

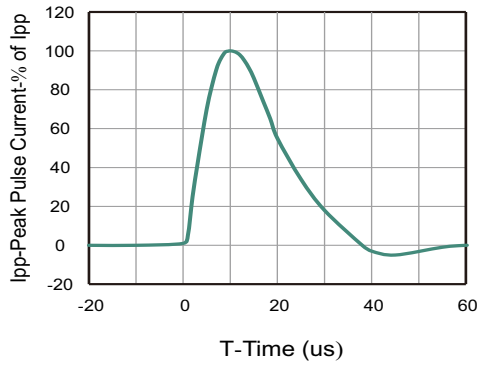


Fig.2 Power Derating Curve


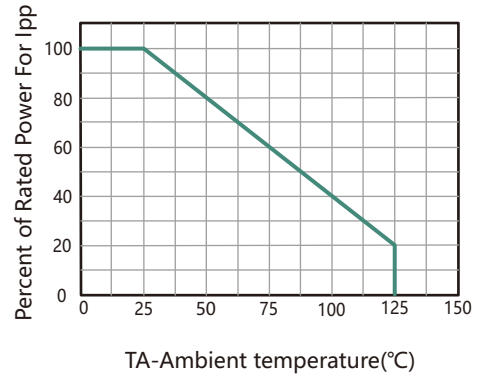


Fig.3 Contact discharge current waveform per IEC6100-4-2




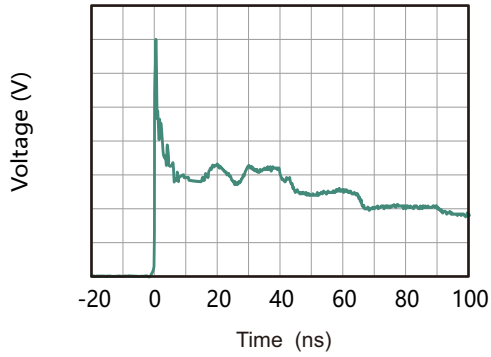


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

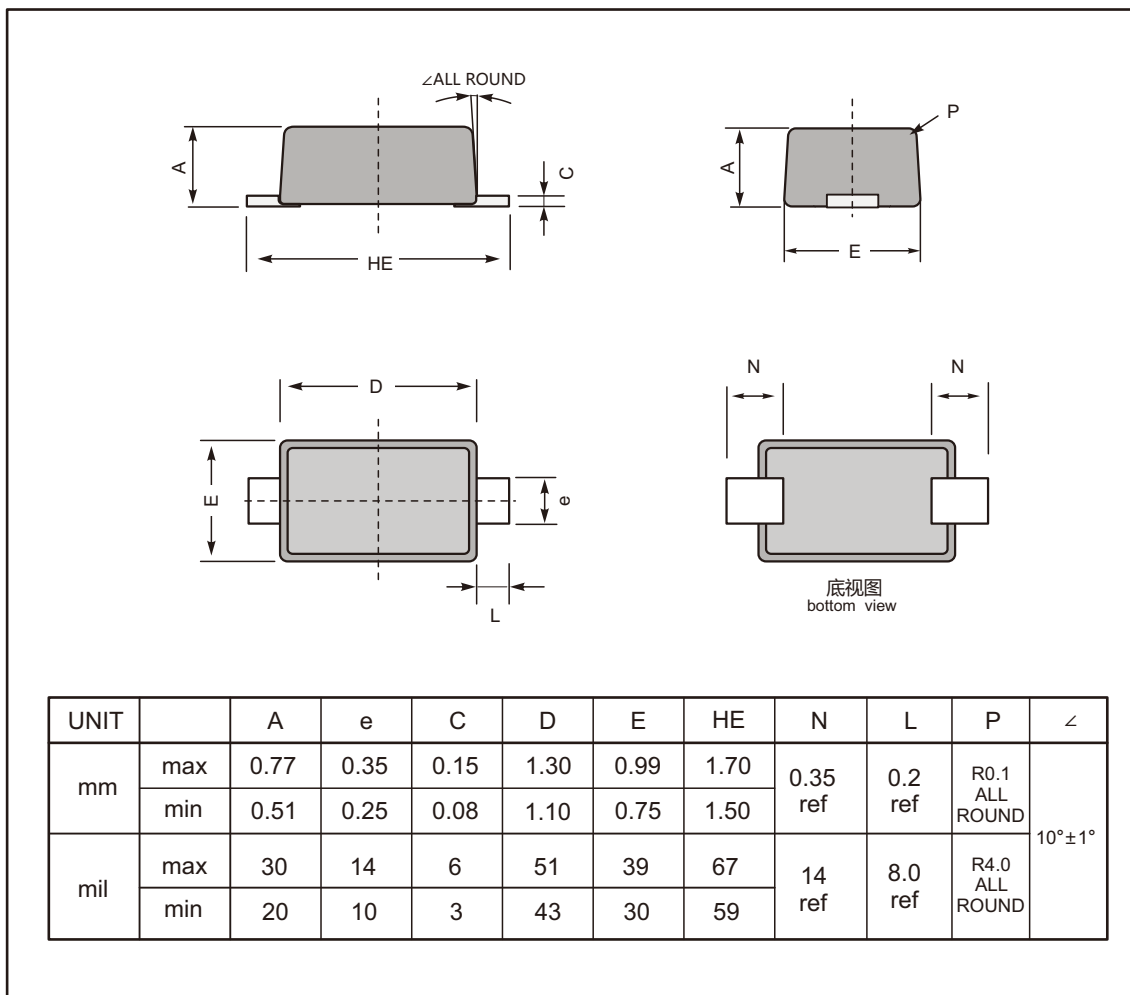

The recommended mounting pad size

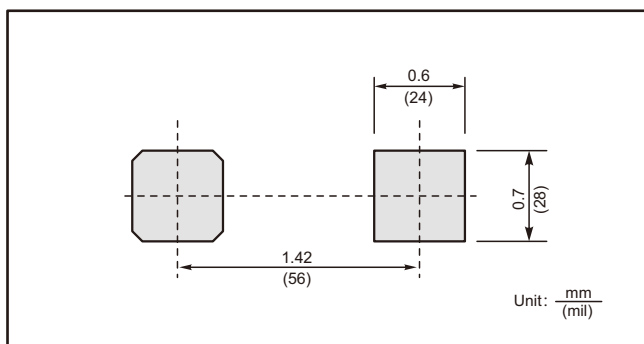

Marking

| Type number | Marking code |
|-------------|--------------|
| ESD2V5D5 | B5 |



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.