

Switching Diodes

Features


- Fast Switching Speed
- Low Forward Voltage
- Fast Reverse Recovery: Maximum of 4ns
- Surface Mount Package Ideally Suited for Automated Insertion
- For General Purpose Switching Applications
- Totally Lead-Free & Fully RoHS Compliant (Notes 1)
- Halogen and Antimony “Green” Device (Note 2)
- Qualified to AEC-Q101 Standards for High Reliability
- PPAP Capable (Note 4)

Mechanical Date

- Case: SOD-323W
- Case Material: Molded Plastic, “Green” Molding Compound;
UL Flammability Classification Rating 94V-0

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

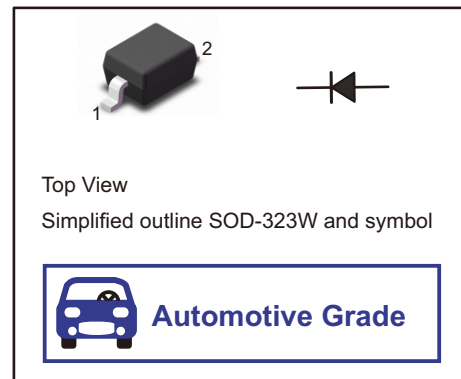

Maximum Ratings(TA=+25°C , unless other otherwise specified)

Parameter	Symbols	MMDL914WB	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100	V
Reverse Voltage	V_R	100	V
Average Rectified Forward Current	$I_{F(AV)}$	200	mA
Non-repetitive Peak Forward Surge Current at 1 ms	I_{FSM}	3	A
Total Power Dissipation	P_{tot}	200	mW
Typical Thermal Resistance (4)	$R_{\theta JA}$	635	°C/W
Operating and Storage Temperature Range	T_J, T_{STG}	-55~+150	°C



Electrical Characteristics(TA=+25°C , unless other otherwise specified)

Parameter		Symbols	MMDL914WB	Units
Reverse Breakdown voltage	at 0.1 mA	$V_{(BR)R}$	100	V
Maximum Forward Voltage	at 10 mA	V_F	1.00	V
Peak Reverse Current	at V=20V Tj=25°C	I_R	0.025	uA
	at V=75V Tj=25°C		5	
Typical Junction Capacitance	f=1MHz,VR=0V	C_j	4	pF
Maximum Reverse Recovery time(5)		t_{rr}	4	ns

Notes

- 1.No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
- 2.Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine,<900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 3.Automotive products are AEC-Q101 qualified and are PPAP capable. Automotive, AEC-Q10x and standard products are electrically and thermally the same,except where specified.
- 4.P.C.B. mounted with 5*5mm copper pad areas.
- 5.Measured with $I_F=I_R=10mA, I_{rr}=0.1xI_R, R_L=100\Omega$.

Fig.1 Power Derating Curve

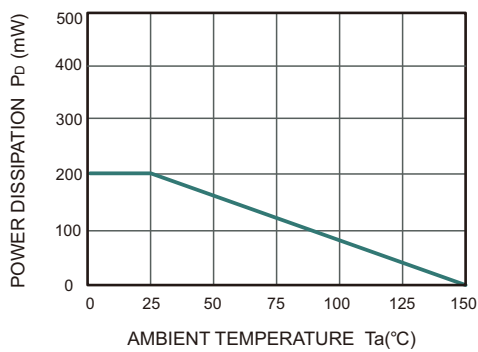


Fig.2 Reverse Characteristics

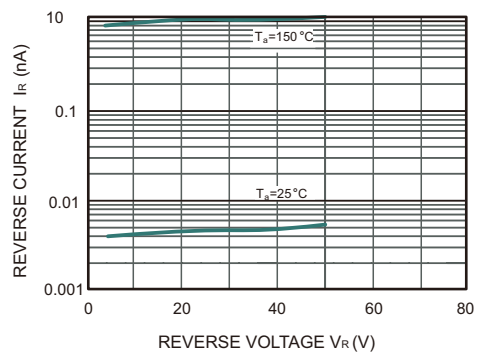


Fig.3 Forward Characteristics


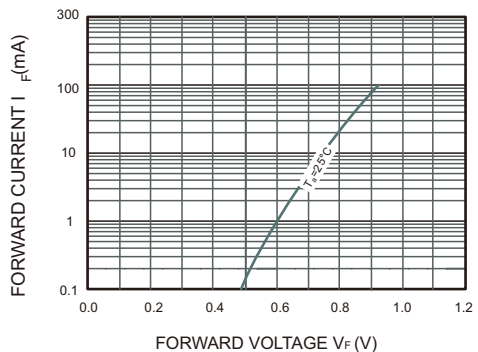


Fig.4 Capacitance Characteristics




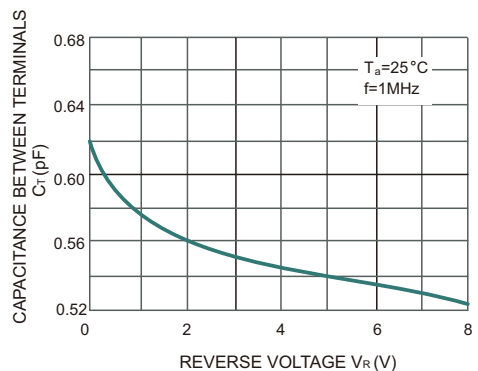


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323W

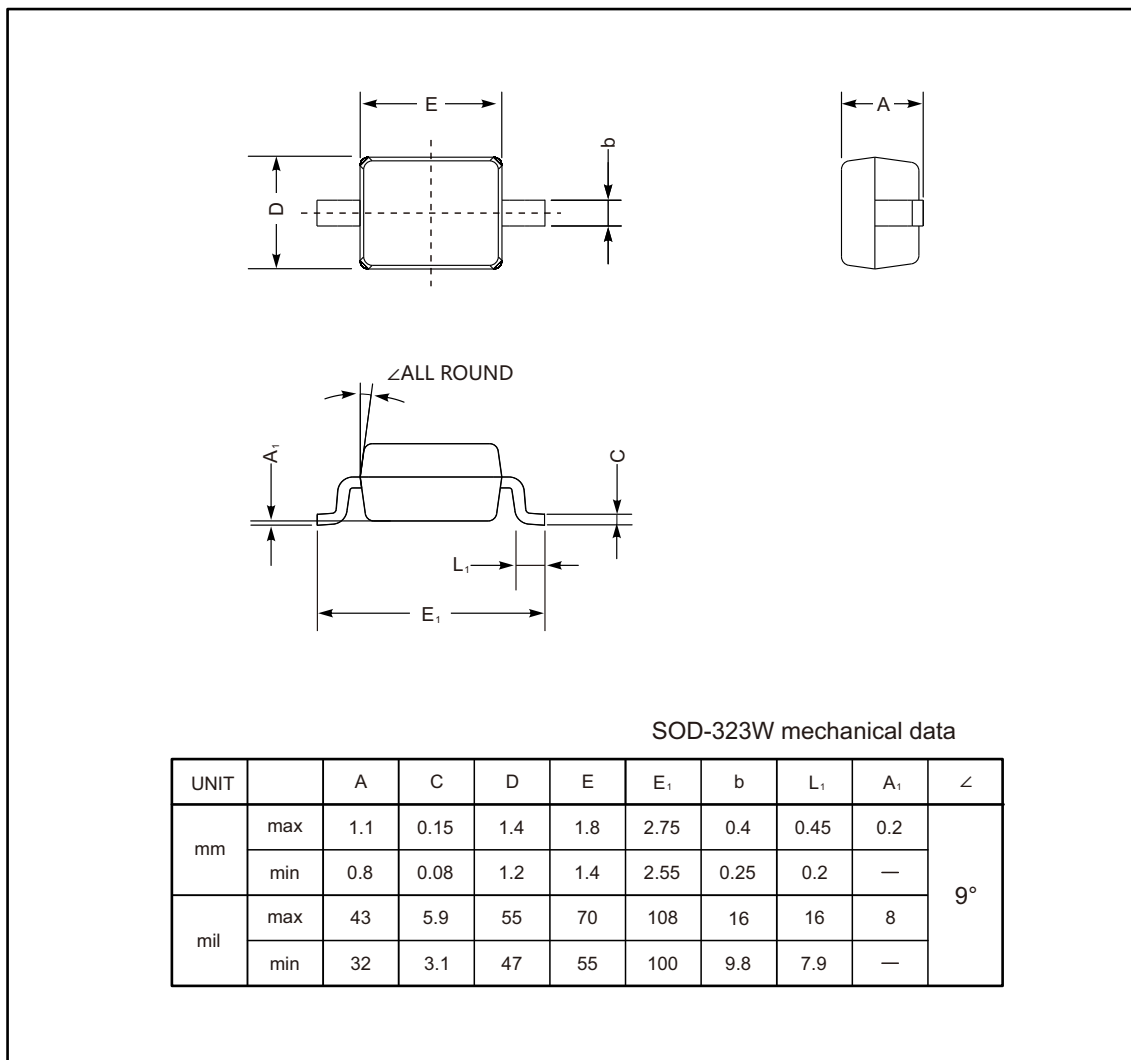

The recommended mounting pad size

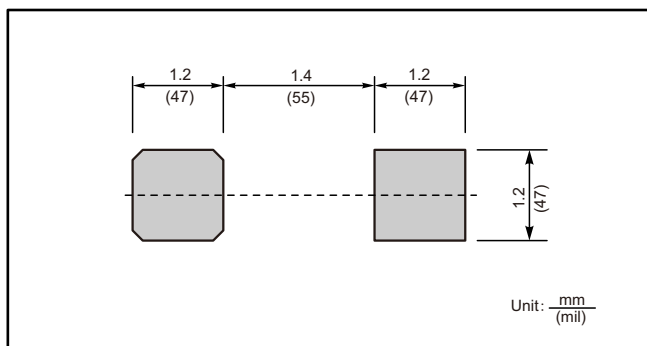

Marking

Type number	Marking code
MMDL914WB	5D



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.