



Surface Mount Zener Diodes

FEATURES


- Total power dissipation: Max. 500mW.
- Wide zener reverse voltage range 2.0 V to 75V.
- Small plastic package suitable for surface mounted design.

MECHANICAL DATA

- Case: SOD-123W
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 16mg/0.00056oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

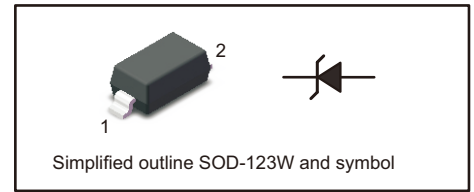

Absolute Maximum Ratings And Characteristics (Ta = 25 °C)

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	500	mW
Forward Voltage at $I_F = 10$ mA	V_F	0.9	V
Typical thermal resistance junction to ambient ⁽¹⁾	$R_{\theta JA}$	305	°C/W
Operating and Storage Temperature Range	T_J, T_{stg}	-55 ~ +150	°C

(1) Thermal resistance from junction to ambient at P.C.B. mounted with 7.6mm X 9.4mm X 0.87mm copper areas pads.

Fig.1 Maximum Continuous Power Derating


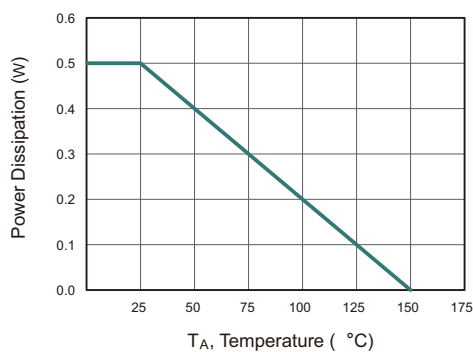


Fig.2 Typical Transient Thermal Impedance



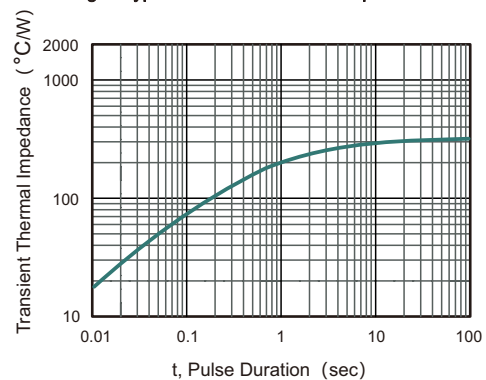

Characteristics at Ta = 25°C

Type	Marking	Zener Voltage Range ⁽²⁾				Maximum Zener Impedance ⁽³⁾				Reverse Current ⁽²⁾	
		V _{ZT} (at I _{ZT})			I _{ZT}	Z _{ZT} @I _{ZT}	I _{ZT}	Z _{ZK} @I _{ZK}	I _{ZK}	I _R	@V _R
		Min (V)	Nom (V)	Max (V)		(Ω)	(mA)	(Ω)	(mA)	μA	V
BZT52C2V0WA	WY	1.91	2.0	2.09	5	100	5	600	1	150	1.0
BZT52C2V4WA	WX	2.2	2.4	2.6	5	100	5	600	1	50	1.0
BZT52C2V7WA	W1	2.5	2.7	2.9	5	100	5	600	1	20	1.0
BZT52C3V0WA	W2	2.8	3.0	3.2	5	95	5	600	1	10	1.0
BZT52C3V3WA	W3	3.1	3.3	3.5	5	95	5	600	1	5.0	1.0
BZT52C3V6WA	W4	3.4	3.6	3.8	5	90	5	600	1	5.0	1.0
BZT52C3V9WA	W5	3.7	3.9	4.1	5	90	5	600	1	3.0	1.0
BZT52C4V3WA	W6	4	4.3	4.6	5	90	5	600	1	3.0	1.0
BZT52C4V7WA	W7	4.4	4.7	5	5	80	5	500	1	3.0	2.0
BZT52C5V1WA	W8	4.8	5.1	5.4	5	60	5	480	1	2.0	2.0
BZT52C5V6WA	W9	5.2	5.6	6	5	40	5	400	1	1.0	2.0
BZT52C6V2WA	WA	5.8	6.2	6.6	5	10	5	150	1	3.0	4.0
BZT52C6V8WA	WB	6.4	6.8	7.2	5	15	5	80	1	2.0	4.0
BZT52C7V5WA	WC	7	7.5	7.9	5	15	5	80	1	1.0	5.0
BZT52C8V2WA	WD	7.7	8.2	8.7	5	15	5	80	1	0.7	5.0
BZT52C9V1WA	WE	8.5	9.1	9.6	5	15	5	100	1	0.5	6.0
BZT52C10WA	WF	9.4	10	10.6	5	20	5	150	1	0.2	7.0
BZT52C11WA	WG	10.4	11	11.6	5	20	5	150	1	0.1	8.0
BZT52C12WA	WH	11.4	12	12.7	5	25	5	150	1	0.1	8.0
BZT52C13WA	WI	12.4	13	14.1	5	30	5	170	1	0.1	8.0
BZT52C15WA	WJ	13.8	15	15.6	5	30	5	200	1	0.1	10.5
BZT52C16WA	WK	15.3	16	17.1	5	40	5	200	1	0.1	11.2
BZT52C18WA	WL	16.8	18	19.1	5	45	5	225	1	0.1	12.6
BZT52C20WA	WM	18.8	20	21.2	5	55	5	225	1	0.1	14.0
BZT52C22WA	WN	20.8	22	23.3	5	55	5	250	1	0.1	15.4
BZT52C24WA	WO	22.8	24	25.6	5	70	5	250	1	0.1	16.8
BZT52C27WA	WP	25.1	27	28.9	2	80	2	300	0.5	0.1	18.9
BZT52C30WA	WQ	28	30	32	2	80	2	300	0.5	0.1	21.0
BZT52C33WA	WR	31	33	35	2	80	2	325	0.5	0.1	23.1
BZT52C36WA	WS	34	36	38	2	90	2	350	0.5	0.1	25.2
BZT52C39WA	WT	37	39	41	2	130	2	350	0.5	0.1	27.3
BZT52C43WA	6A	40	43	46	2	130	2	500	1	2	33
BZT52C47WA	6B	44	47	50	2	150	2	500	1	2	36
BZT52C51WA	6C	48	51	54	2	180	2	500	1	1	37
BZT52C56WA	6D	52	56	60	2	180	2	500	1	1	43
BZT52C62WA	6E	58	62	66	2	200	2	500	1	0.2	47
BZT52C68WA	6F	64	68	72	2	250	2	500	1	0.2	52
BZT52C75WA	6H	70	75	79	2	300	2	500	1	0.2	57

NOTES: (1) f=1KHz

(2) Short duration test pulse used to minimize self-heating effect.


(3) V_{ZT} is tested with pulses 20ms.



PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-123W

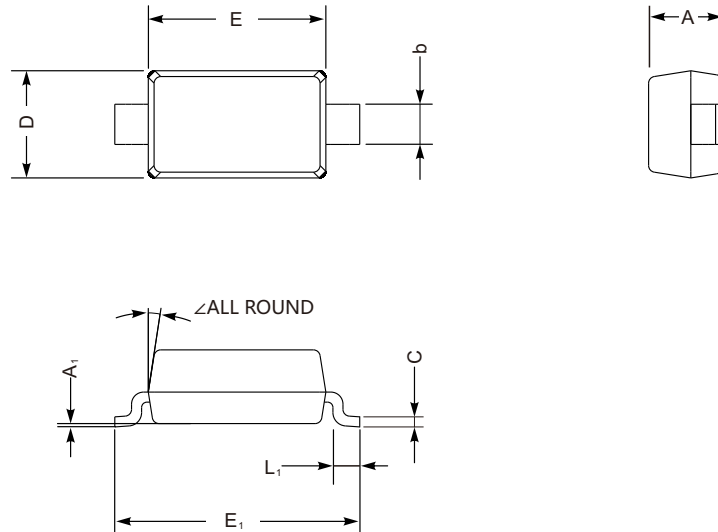

SOD-123W mechanical data

UNIT		A	C	D	E	E ₁	L ₁	b	A ₁	∠
mm	max	1.3	0.22	1.8	2.8	3.9	0.45	0.7	0.2	9°
	min	0.9	0.09	1.5	2.5	3.6	0.25	0.5	—	
mil	max	51	8.7	71	110	154	18	28	8	
	min	35	3.5	59	98	142	10	20	—	

The recommended mounting pad size

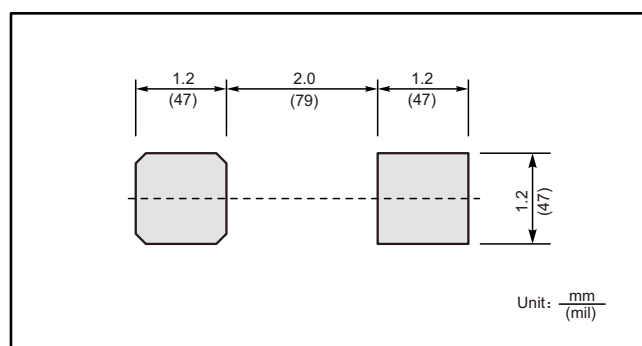



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.