



Silicon Planar Zener Diodes

FEATURES


- Total power dissipation: Max. 300mW.
- Wide zener reverse voltage range 2.0V to 75V.
- Small plastic package suitable for surface mounted design.
- Tolerance approximately $\pm 2\%$

MECHANICAL DATA

- Case: SOD-323W
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 5.48mg / 0.00019oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

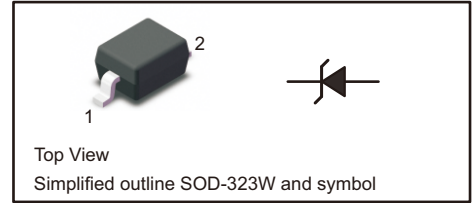

Absolute Maximum Ratings And Characteristics (Ta = 25 °C)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	300	mW
Forward Voltage at $I_F = 10$ mA	V_F	0.9	V
Typical thermal resistance junction to ambient ⁽¹⁾	$R_{\theta JA}$	417	°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150	°C

(1) Thermal resistance from junction to ambient at P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper areas pads.

Fig.1 Maximum Continuous Power Derating


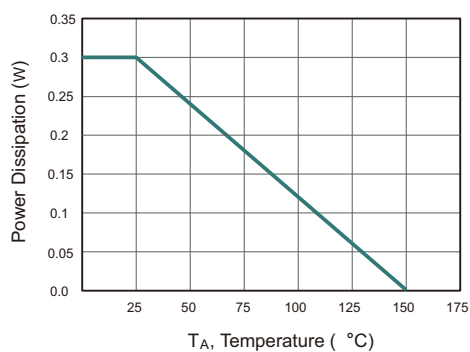


Fig.2 Typical Transient Thermal Impedance



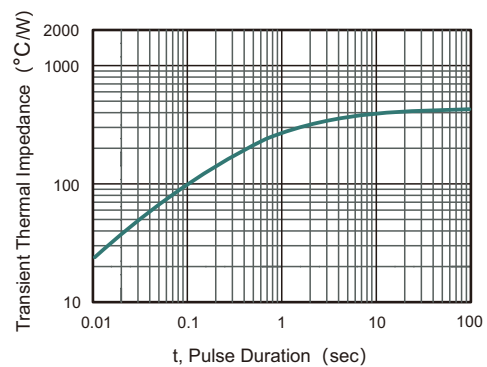

Characteristics at Ta = 25°C

Type	Marking	Zener Voltage Range ⁽¹⁾			I _{ZT}	Dynamic Impedance	Reverse Current	
		V _{ZT} (at I _{ZT})				Z _{ZT} (at I _{ZT})	I _R	at V _R
		Min (V)	Nom (V)	Max (V)	(mA)	Max (Ω)	Max (μA)	(V)
MM3Z2V0BWB	0B	1.96	2.0	2.04	5	100	120	0.5
MM3Z2V2BWB	0C	2.16	2.2	2.24	5	100	120	0.7
MM3Z2V4BWB	C1	2.35	2.4	2.45	5	100	120	1
MM3Z2V7BWB	D1	2.65	2.7	2.75	5	110	120	1
MM3Z3V0BWB	E1	2.94	3.0	3.06	5	120	50	1
MM3Z3V3BWB	F1	3.23	3.3	3.37	5	130	20	1
MM3Z3V6BWB	H1	3.53	3.6	3.67	5	130	10	1
MM3Z3V9BWB	J1	3.82	3.9	3.98	5	130	5	1
MM3Z4V3BWB	K1	4.21	4.3	4.39	5	130	5	1
MM3Z4V7BWB	M1	4.61	4.7	4.79	5	130	2	1
MM3Z5V1BWB	N1	5	5.1	5.2	5	130	2	1.5
MM3Z5V6BWB	P1	5.49	5.6	5.71	5	80	1	2.5
MM3Z6V2BWB	R1	6.08	6.2	6.32	5	50	1	3
MM3Z6V8BWB	X1	6.66	6.8	6.94	5	30	0.5	3.5
MM3Z7V5BWB	Y1	7.35	7.5	7.65	5	30	0.5	4
MM3Z8V2BWB	Z1	8.04	8.2	8.36	5	30	0.5	5
MM3Z9V1BWB	A2	8.92	9.1	9.28	5	30	0.5	6
MM3Z10BWB	B2	9.8	10	10.2	5	30	0.1	7
MM3Z11BWB	C2	10.78	11	11.22	5	30	0.1	8
MM3Z12BWB	D2	11.76	12	12.24	5	35	0.1	9
MM3Z13BWB	E2	12.74	13	13.26	5	35	0.1	10
MM3Z15BWB	F2	14.7	15	15.3	5	40	0.1	11
MM3Z16BWB	H2	15.68	16	16.32	5	40	0.1	12
MM3Z18BWB	J2	17.64	18	18.36	5	45	0.1	13
MM3Z20BWB	K2	19.6	20	20.4	5	50	0.1	15
MM3Z22BWB	M2	21.56	22	22.44	5	55	0.1	17
MM3Z24BWB	N2	23.52	24	24.48	5	60	0.1	19
MM3Z27BWB	P2	26.46	27	27.54	2	70	0.1	21
MM3Z30BWB	R2	29.4	30	30.60	2	80	0.1	23
MM3Z33BWB	X2	32.34	33	33.66	2	80	0.1	25
MM3Z36BWB	Y2	35.28	36	36.72	2	90	0.1	27
MM3Z39BWB	Z2	38.22	39	39.78	2	100	0.1	30
MM3Z43BWB	A3	42.14	43	43.86	2	130	0.1	33
MM3Z47BWB	B3	46.06	47	47.94	2	150	0.1	36
MM3Z51BWB	C3	49.98	51	52.02	2	180	0.1	39
MM3Z56BWB	D3	54.88	56	57.12	2	200	0.1	43
MM3Z62BWB	E3	60.76	62	63.24	2	215	0.1	47
MM3Z68BWB	F3	66.64	68	69.36	2	240	0.1	52
MM3Z75BWB	H3	73.5	75	76.5	2	265	0.1	56


(1) V_{ZT} is tested with pulses (20 ms)



PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-323W

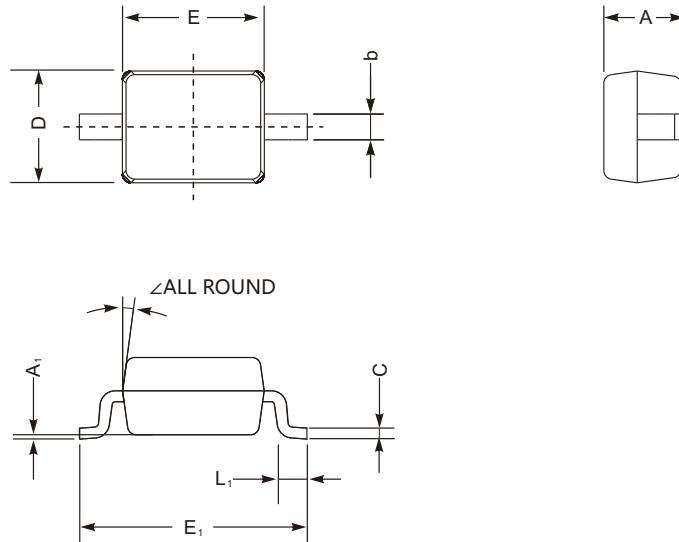

SOD-323W mechanical data

UNIT		A	C	D	E	E ₁	b	L ₁	A ₁	$\angle$
mm	max	1.1	0.15	1.4	1.8	2.75	0.4	0.45	0.2	9°
	min	0.8	0.08	1.2	1.4	2.55	0.25	0.2	—	
mil	max	43	5.9	55	70	108	16	16	8	
	min	32	3.1	47	55	100	9.8	7.9	—	

The recommended mounting pad size

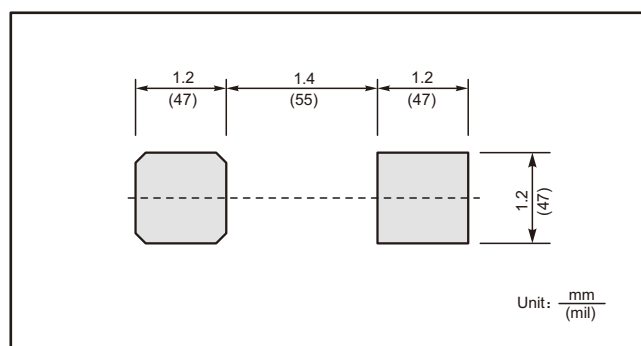



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.